

PACKAGING SPECIFICATION
GALVANISED 200 litre DRUM WITH COVER

Characteristics

Body, bottom and cover


Material:	Steel sheet ST 12.03
Thickness of the material:	1.25 mm
Treatment:	Thermally galvanised
Cover sealing:	PDM cellular rubber
Total volume:	220 litres
Practical volume:	200 litres
Finishing:	Painted exterior
Colour:	Black

Sealing ring

Material:	Galvanised sheet steel Dx51D EN-10142
Thickness of the material:	2 mm
Bolt:	Hexagon socket head M10x80
Total empty weight:	24.5 kg
ONDRAF/NIRAS code:	27
Maximum allowed gross weight:	250 kg



DIMENSIONS (mm)

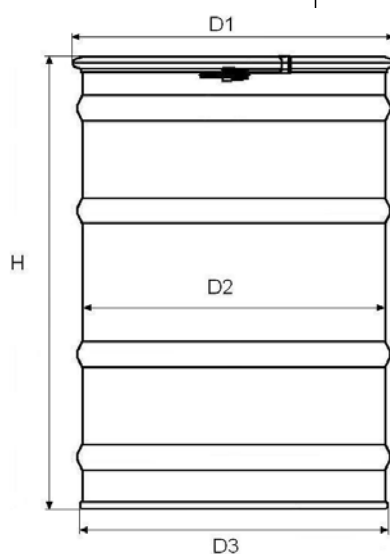

H = 880
D1 = diameter 615
D2 = diameter 574
D3 = diameter 588

INSTRUCTIONS FOR USE

The drum may be used for transport and storage of unconditioned radioactive waste. Care must be taken not to deform the drum during filling. Before closing the drum, both the sealing of the cover and the sealing rim of the drum must be checked for any dirt or damage, etc. that could hinder proper closure. The sealing ring must be tightened until maximum overlap is achieved. Transport must always be carried out with specially adapted tools and it should not cause any deformation of or damage to the drum. Proper care must be observed when loosening the sealing ring and opening the drum (pressure on the sealing ring and the cover). The container has been **IP-2** approved by the Physical Control of Belgoprocess.